




锂电+行业解决方案先锋

高尔夫球车/低速车/多用途车
磷酸铁锂电池

高尔夫球车锂电池全球领导品牌

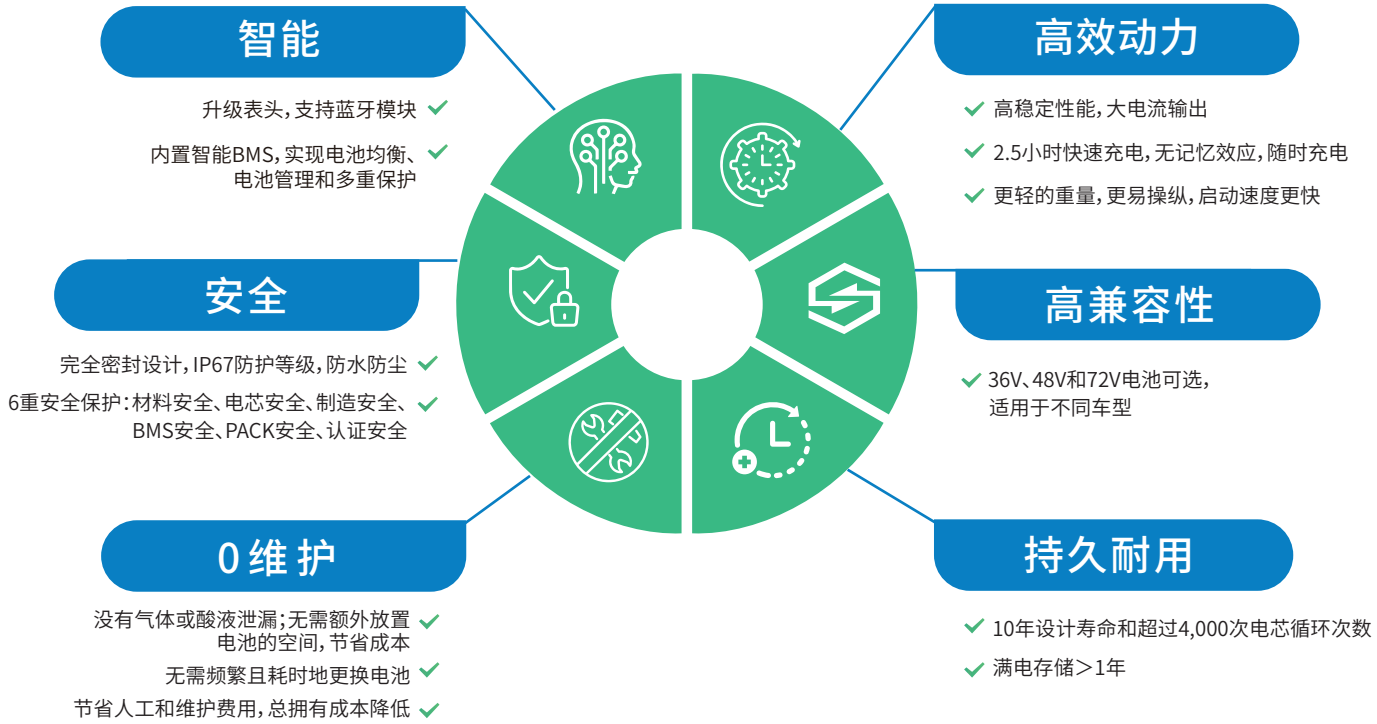

技术规格

型号	额定电压	额定容量	额定电量	循环次数	持续充电/放电电流	最大充电/放电电流	典型里程	尺寸(长*宽*高)	重量 lbs. (kg)	防护等级
L系列										
S38100L	38.4 V	100 Ah	3.84 kWh	>4,000 次数	30 A / 200 A	40 A / 300 A	30-40 miles (48-64 km)	15.34 x 10.83 x 10.63 inch (389.6 x 275.1 x 270 mm)	94.80±4.41 lbs (43±2 kg)	IP67
S5165L	51.2 V	65 Ah	3.33 kWh	>4,000 次数	30 A / 130 A	55 A / 195 A	25-32 miles (40-51 km)	18.11 x 10.94 x 10.24 inch (460 x 278 x 260 mm)	88.18 lbs (≤40 kg)	IP67
S51100L	51.2 V	100 Ah	5.10 kWh	>4,000 次数	30 A / 130 A	40 A / 300 A	40-50 miles (64-80 km)	15.34 x 10.83 x 10.63 inch (389.6 x 275.1 x 270 mm)	110.23±4.41 lbs (50±2 kg)	IP67
S51150L	51.2 V	150 Ah	7.68 kWh	>3,000 次数	30 A / 150 A	50 A / 350 A	60-70 miles (97-113 km)	31.50 x 12.60 x 8.58 inch (800 x 320 x 218 mm)	149.91 lbs (68 kg)	IP67
S51200L-A	51.2 V	200 Ah	10.24 kWh	>4,000 次数	100 A / 200 A	120 A / 300 A	80-100 miles (128-160 km)	19.17 x 13.15 x 20.87 inch (488 x 334 x 530 mm)	198.42±11.02 lbs (91±5 kg)	IP67
S51230L	51.2 V	230 Ah	11.776kwh	>4,000 次数	30 A / 230 A	100 A / 230 A	100-120 miles (160-190 km)	20.94 x 22.16 x 11.63 inch (532 x 563 x 295.5 mm)	209.43±22.05 lbs (95±10 kg)	IP67
P系列										
S51105P-N	51.2 V	100 Ah	5.12 kWh	>4,000 次数	30 A / 130 A	55 A / 315 A	40-50 miles (64-80 km)	22.17 x 12.99 x 9.98 inch (565 x 330 x 253.6 mm)	105.82±4.41 lbs (48±2 kg)	IP67
S51150P-A	51.2 V	150 Ah	7.68 kWh	>3,000 次数	30 A / 180 A	40 A / 315 A	60-70 miles (97-113 km)	31.50 x 14.19 x 8.78 inch (800 x 360.4 x 223 mm)	145.51±6.61 lbs (66±3 kg)	IP67
S72100P-B	76.8 V	100 Ah	7.68 kWh	>4,000 次数	20 A / 100 A	40 A / 300 A	60-70 miles (97-113 km)	31.50 x 12.97 x 10.08 inch (800 x 329.4 x 256 mm)	147.71±11.02 lbs (67±5 kg)	IP67
S72150P-A	76.8 V	150 Ah	11.52kWh	>4,000 次数	30 A / 160 A	50 A / 315 A (30 S)	80-100 miles (130-180 km)	37.80 x 17.56 x 10.69 inch (960 x 446 x 271.5 mm)	220.46±22.05 lbs (100±10 kg)	IP67
S72200P-A	76.8 V	200 Ah	15.36 kWh	>4,000 次数	30 A / 180 A	50 A / 315 A (30 S)	100-120 miles (150-200 km)	44.78 x 16.14 x 10.51 inch (1137.6 x 410 x 267 mm)	275.57±22 lbs (125±10 kg)	IP67
工作温度范围		充电 32°F~131°F (0°C ~ 55°C)		放电 -4°F~131°F (-20°C ~ 55°C)		存储 (一个月) -4°F~131°F (-20°C ~ 55°C)		存储 (1年) 32°F~95°F (0°C~35°C)		

备注:1. 仅授权人员被允许操作或调整电池。
2. 所有数据基于乐亿通标准测试程序。实际性能可能会根据当地条件而有所变化。